

Flush-mounted range

Material

Duroplastic/Thermoplastic

Protection level

Protection level IP 44 is ensured with sealing gasket ref.-no. 551 WU and „IP 44 frame“ of the respective design range.



L Laser labelling possible

P Colour printing possible

Colours


P ivory	similar	RAL 1013
P white	similar	RAL 9010
P light grey	similar	RAL 7035
grey	similar	RAL 7038
brown	similar	RAL 8022
black	similar	RAL 9005

Metal versions (anodized aluminium)

gold-bronze
platinum

Selected devices are available in the colours

L orange	similar	RAL 2004
L green	similar	RAL 6029

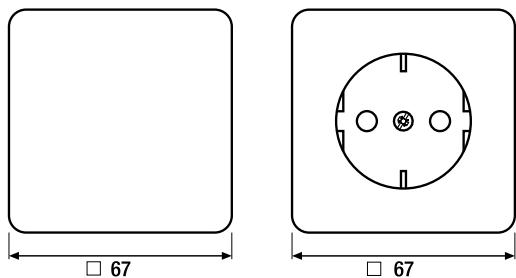

Frame size

1-gang	81 mm x 81 mm
2-gang	152 mm x 81 mm
3-gang	223 mm x 81 mm
4-gang	294 mm x 81 mm
5-gang	365 mm x 81 mm

Frames can be installed horizontally and vertically.

Corner radius of frames R 8.5

