



1:1

**Flush-mounted range**

**Material**

Duroplastic (frames)  
Thermoplastic (internal/external  
colour frames)

**Protection level**

Protection level IP 44 is ensured with  
sealing gasket ref.-no. 551 WU and  
„IP 44 frame“ of the respective design  
range.

**L** Laser labelling possible

**P** Colour printing possible



**Colours rockers**

- P** ivory similar RAL 1013
- P** white similar RAL 9010
- P** light grey similar RAL 7035
- grey similar RAL 7038
- brown similar RAL 8022
- black similar RAL 9005

**Metal versions anodized aluminium**


- L** gold-bronze
- L** platinum

**Colours frames**


- white similar RAL 9010
- light grey similar RAL 7035
- black similar RAL 9005

**Colours internal/external frames**

- 1 light grey
- 2 yellow
- 3 light green
- 4 stainless steel
- 5 granite
- 6 metallic green
- 7 metallic black
- 8 metallic blue
- 9 metallic red
- 10 chrome
- 11 gold

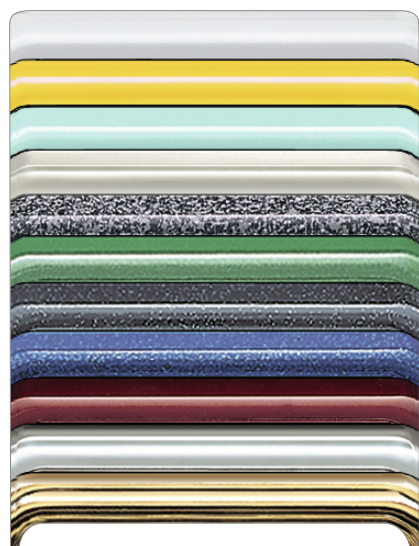

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11

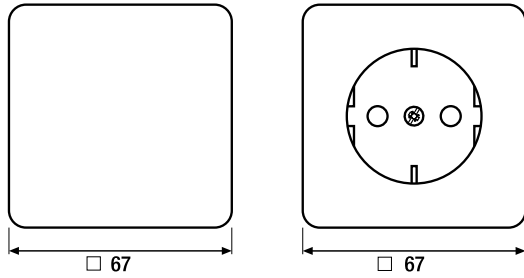

**Frame size**

1-gang	84 mm x 84 mm
2-gang	155 mm x 84 mm
3-gang	226 mm x 84 mm
4-gang	297 mm x 84 mm
5-gang	368 mm x 84 mm

Frames can be installed horizontally and vertically.

**Corner radius of frames R 5.4**

